


GENERAL DYNAMICS Land Systems

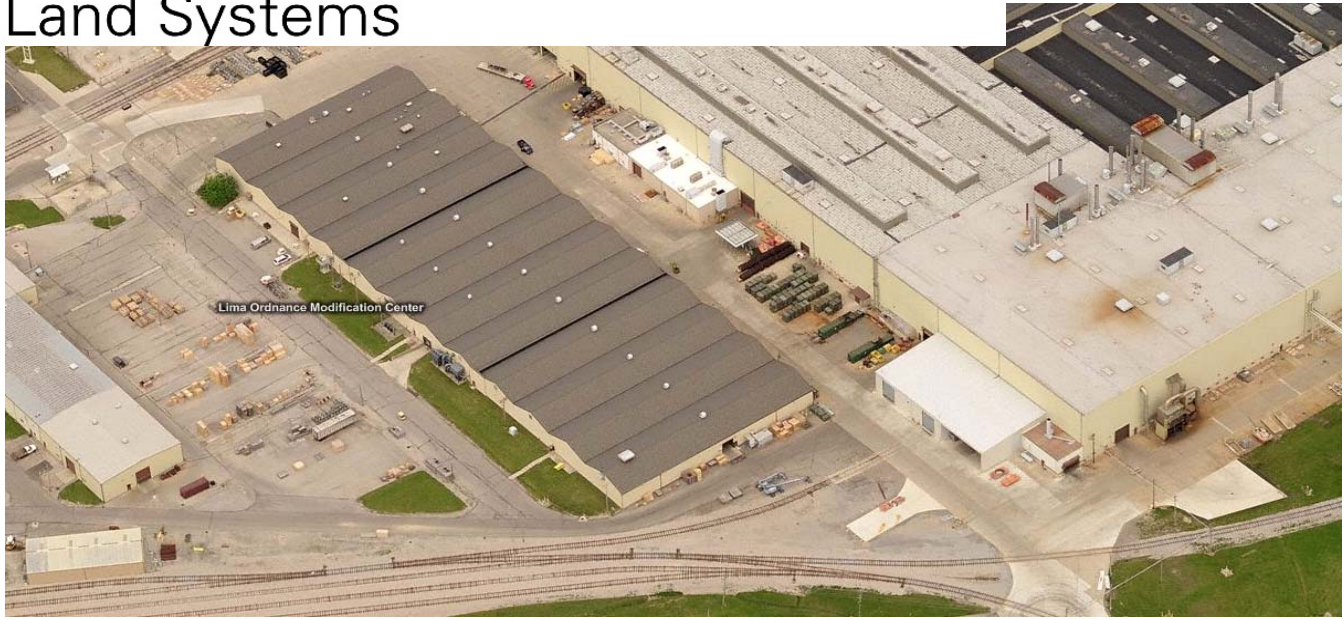

PROJECT CONTACTS:

Owner:

General Dynamics Land System.
Lima Army Tank Plant
1161 Buckeye Road
Lima, OH 45804
Contact: Ken Stegall, CMS
Phone: 937-728-0639

Architect/Engineer:

Corp of Engineers
Contact: Kevin Kunke

General Contractor:

Tuttle Construction, Inc.
880 Shawnee Road
Lima, Ohio 45805
419-228-6262
Project Manager:
Tom Thomas
Site Superintendent:
Don Collins

Roadway Concrete Replacement Project

Project inception date: August 13, 2007

Project completion date: October 5, 2007

Contract Amount: \$310,554.00

Construction type: Prime Contractor - Hard Bid

Project scope:

Removed 9" thick reinforced concrete pavement, excavated and re-graded roadway prior to placing stone base and new reinforced concrete pavement.

More specifically: Tuttle provided removal and replacement of approximately 2,697 square yards of concrete pavement located between building no. 147 and 186. The existing 9" thick concrete pavement was removed and disposed of at an environmental approved off site dump. The new 9" thick high-early strength concrete pavement included steel reinforcing bars and dowel bars and were installed in two phases with a minimum of 14 days cure time between each phase. Plant traffic was maintained throughout both phases of construction at the request of the plant manager. Extensive paperwork and coordination with the Corp. of Engineers and the General Dynamic's management team was necessary to maintain the plants daily activities with as little effect from the construction crews as possible.